
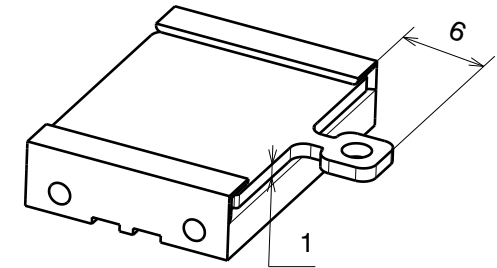


Application Example:

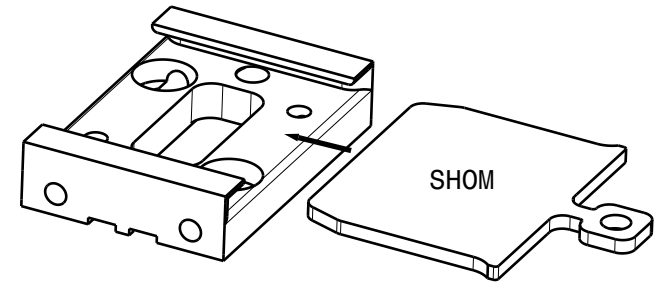

$\sqrt{\text{Ra } 0.8}$ (✓)
 $\swarrow \begin{matrix} +0.2 \\ +0.1 \end{matrix}$
 $\searrow \begin{matrix} -0.1 \\ -0.2 \end{matrix}$

Material: available in diff configurations		nominal $\leq 30\text{mm}$	DIN ISO 2768-f-H
		dimensions $> 30\text{mm}$	DIN ISO 2768-m-K excluding Sym./Runout
Drawer Style Receivers for Flag Style Plates		Sym./Runout $> 30\text{mm}$	DIN ISO 2768-H
RECOM		formed part dimensions	DIN ISO 2768-f-H
		Scale	Drawn M. Nyirö
		2:1	Date 11.10.2010
			Changed 04.08.2021 CW
Ferrovac CH-8050 Zurich		<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FERROVAC. ANY REPRODUCTION IN PART OR AS WHOLE WITHOUT OUR PERMISSION IS PROHIBITED.</small>	
Rev.	B		