



Application Example

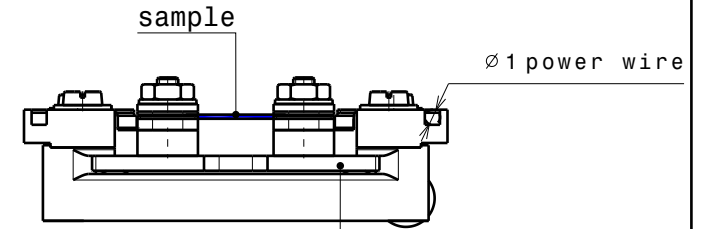

sample plate for direct current heating
product code: SHOMDC or SHOMDC(N)

optional GND connection screw

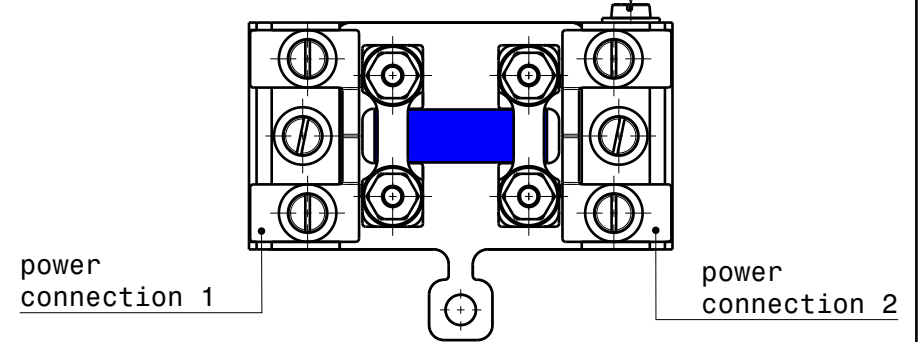


RECOMDC + SHOMDC




from power connection 1
to power connection 2

current flow

RECOMDC + SHOMDC(N)



from power connection 1 or 2 through
sample plate and receiver to GND



Material: 1.4301, Mo, Shapal M, Ruby	nominal ≤30mm dimensions >30mm	DIN ISO 2768-f-H DIN ISO 2768-m-K excluding Sym./Runout
Receiver for DC-heating	Sym./Runout >30mm	DIN ISO 2768-H
RECOMDC	formed part dimensions	DIN ISO 2768-f-H
	Scale	Drawn C.Weiss
		Date 15.12.2020
		Changed
Ferrovac GmbH CH-8050 Zurich	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FERROVAC GMBH. ANY REPRODUCTION IN PART OR AS WHOLE WITHOUT OUR PERMISSION IS PROHIBITED.	2:1
Rev.	A	RECOMDC A4 sheet 1/1