
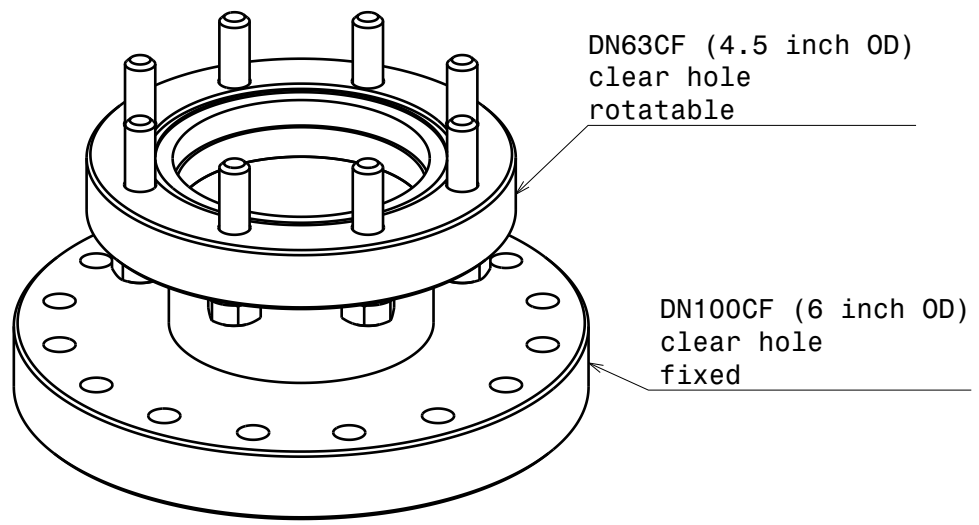
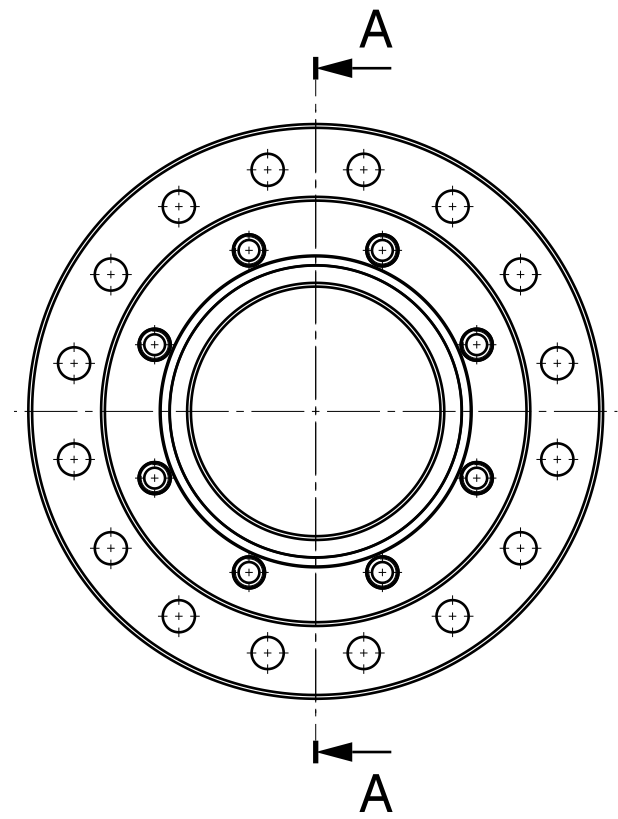


A-A

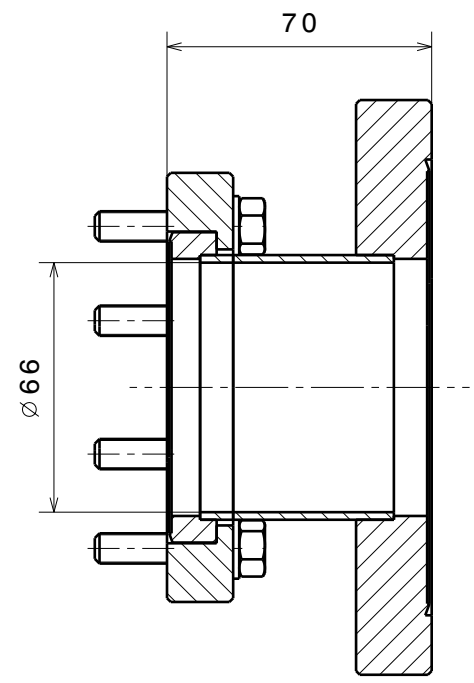

$\nabla$  Ra 0.8 (✓)    
 ↙  $\begin{matrix} +0.2 \\ +0.1 \end{matrix}$     
 ↘  $\begin{matrix} -0.1 \\ -0.2 \end{matrix}$

Material: All UHV compatible	nominal $\leq 30\text{mm}$	DIN ISO 2768-f-H
	dimensions $> 30\text{mm}$	DIN ISO 2768-m-K excluding Sym./Runout
DN100CF (6 inch OD), DN63CF (4.5 inch OD) Through Hole Adapter, one flange rotatable MXY63	Sym./Runout $> 30\text{mm}$	DIN ISO 2768-H
	formed part dimensions	DIN ISO 2768-f-H
Scale	Drawn	M. Müller
	Date	16.12.2019
	Changed	.....
<b>Ferrovac GmbH</b> CH-8050 Zurich	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FERROVAC GMBH. ANY REPRODUCTION IN PART OR AS WHOLE WITHOUT OUR PERMISSION IS PROHIBITED.	
	1:2 Rev. A	UPGRADEMXY63 (+RNC F100CF63RL70) A4 sheet 1/1